


FRAGMENTS

NON-WOVEN TEXTILE WALLCOVERING



WITH METALLIC EFFECT

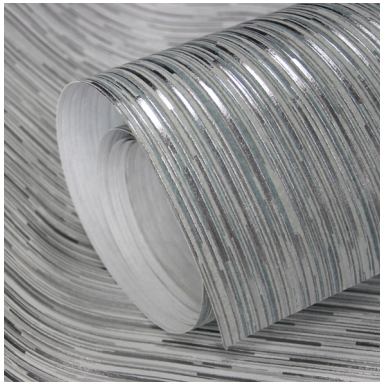

NB : The portrayed colours may differ from reality.

References FRA...

Composition: mixture of cellulose and polyester

Weight: $\pm 184 \text{ g/m}^2$ ($\pm 5,37 \text{ oz/sq yd}$)

The wallcovering can be installed horizontally or vertically.

Custom colouring on request.



Width of the wallcovering:
100 cm (39" 1/3).



Pattern repeat is
0 cm (0") and
the design does
not need to be
matched.



This design
requires reverse
hanging.



Fire resistant:
EU: B, S1-D0
US: class A



Light resistant:
Xeno test 7



Spongeable
during
installation



Washable after
installation



Apply a ready mixed
PVA or EVA clear
adhesive directly to
the wall, no need to
humidify the back of
the wallcovering.



1121/14

Product
complying with
the Council
Directive 96/98/
EC on Marine
Equipment.



Sold by cut
length.



Manufactured
with recycled
fibres



Printed with
solar energy



Ecological



FSC
www.fsc.org
FSC® C001706
The mark of
responsible forestry

More information and samples are available on request.

Omexco n.v. - Ambachtenlaan 12 - 3001 Heverlee - Belgium
T. +32 16 40 18 80 - F. +32 16 40 00 17 - info@omexco.com

www.omexco.com